

Waterlogic 800 Max II

The WL800 Max II is designed to meet the high demands for cold and hot water in high traffic areas. The intuitive paddle operation and tall dispensing area enables users to easily fill large jugs and carafes. With an ultraviolet system to maintain water hygiene and large capacity tanks, you are assured a continuous supply of clean and refreshing water.

Waterlogic's latest high capacity water dispenser for demanding environments.

Making Water Great

This Waterlogic dispenser offers two great steps to fresh water:



1. Filtration: The WL800 offers the option of either carbon filtration or a four-stage reverse osmosis (RO) process to produce the best quality drinking water. RO includes: a sediment filter; pre carbon filter; reverse osmosis membrane; and a post carbon filter. These filters remove impurities and improve taste* to give you the best water possible.



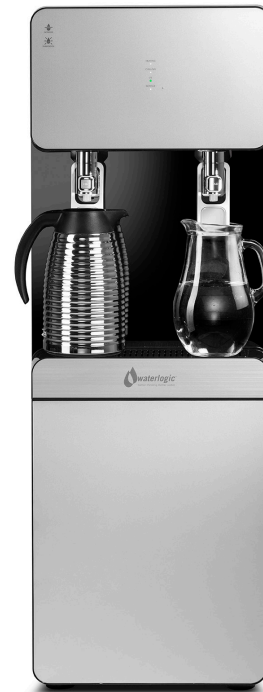
2. UV Sanitization: Re-circulating UV system sanitizes the water by reducing bacterial growth giving a reassurance of fresh clean drinking water.

* Where applicable






High quality water in volume

- Cold and hot options
- Easy to clean and use faucets
- Hot water safety feature to protect against accidental usage
- Tall dispensing area is ideal for filling large jugs and carafes
- Re-circulating UV lamp maintains water hygiene
- Optional RO filtration (reverse osmosis) to make the poorest quality water good
- Carbon filtration ideal for most water conditions
- Sleek profile for good looks and castors on base for easy relocation



The Boring Bits

Water Options	Technical Features	
	Type available	Tower
	Freestanding dimensions	16.9" (W) x 49.2" (H) x 20.1" (D) 430mm (W) x 1250mm (H) x 510mm (D)
	Dispense area height	11.7" (298mm)
	Weight	95lbs (43.5kg)
	Standard filtration supplied	RO (Reverse Osmosis)
	Purification system	UV lamp (4W)
Symbols	Capacity	
 Cold water  Hot water	Room temperature: 3.7 gal (14 liters) Cold: 4.2 gal (16 liters) Hot: 1 gal (3.5 liters) 500W heater Production rate: 190 L/d (25°C, 138 kPa) (50 gal)	
	Additional features	
	Compressor	
	Water temperatures	
		Leak detection Removable drip tray Overfill protection
		110v / 60Hz or 220v / 50Hz
		Cold: 41°F / 5°C Hot: 185°F / 85°C

Tested and Certified



Waterlogic International Limited and WLI Trading Limited reserves the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Waterlogic and the Waterlogic logo, Firewall and the Firewall logo are trademarks in countries where the Group operates. WLT Trading Ltd is licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.

Speak to a Water Expert

Tel: + 844-283-3514

info@waterlogicsusa.com
www.waterlogicsusa.com